

DPT-Flow - Air flow and velocity transmitter



DPT-Flow air flow transmitters are designed for building automation systems. These technologically advanced transmitters can measure volume flow, velocity, and static and differential pressure.

The transmitters can be connected directly to the pressure measurement points of a centrifugal fan, providing accurate flow measurement. The user interface enables easy selection of settings according to the selected fan or measurement probe.

The devices include several properties and selectable functions:

- Measuring and monitoring in-duct volume flow, velocity or differential pressure
- Measuring and monitoring air flow across centrifugal fans
- Multiple selectable measurement units
- Voltage or current output
- Automatic zeroing as an option (-AZ models)
- Low temperature resistance as an option (-40C models)


-AZ models include automatic zeroing function, which zeroes the pressure measurement every 10 minutes. With automatic zeroing, the transmitter zero point is kept accurate by automatically eliminating the possible zero point drifting. The function also helps the device maintenance by removing the need of periodical manual zeroing by a service person.

Technical specifications







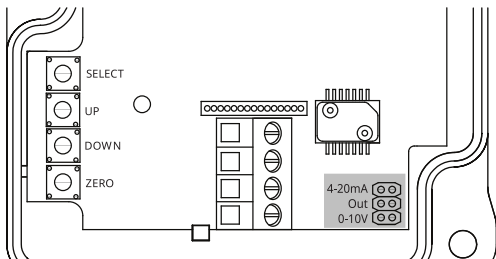




Property	Value
Supply	24 Vac/dc (22...26 V)
Power consumption	< 1 VA
Power consumption (-40C models)	< 4 VA (when temperature is below 0 °C)
Pressure measurement	
Range	
-1000 models	*0...1000 Pa / custom setting
-2000 models	*0...2000 Pa / custom setting
-5000 models	*0...5000 Pa / custom setting
-7000 models	*0...7000 Pa / custom setting
Accuracy (25 °C)	
-1000 and -2000 models	<ul style="list-style-type: none"> • pressure < 125 Pa = ±1 % ±2 Pa • pressure > 125 Pa = ±1 % ±1 Pa

Property	Value
-5000 and -7000 models	<ul style="list-style-type: none"> pressure < 125 Pa = ±1.5 % ±2 Pa pressure > 125 Pa = ±1.5 % ±1 Pa
Time constant	1...20 s
Zero point calibration	manual with push button
Zero point calibration (-AZ models)	automatic
Max. over pressure	30 kPa
Connection	Ø5 mm / Ø6.3 mm
Medium	dry air or non-aggressive gas
Output	*0...10 / 2...10 Vdc, > 1 kΩ 4...20 mA, load 20...500 Ω
Display	backlit dot matrix display
Wiring terminals	1.5 mm ²
Operating conditions	
Temperature	-20...50 °C
Temperature (-AZ models)	-5...50 °C
Temperature (-40C models)	-40...50 °C
Humidity	0...95 %rH (non condensing)
Housing	
Material	ABS and PC plastic
Protection class	IP54
Cable gland	M16
Mounting	2 x Ø4.3 mm screw holes, one slotted
Dimensions (w x h x d)	90 x 95 x 36 mm
Weight	150 g
	* factory default


Output settings



	Current output (4...20 mA) selected for flow
	*Voltage output (0...10 V / 2...10 V) selected for flow

Type	Product number	Description
 DPT-Flow-1000-AZ-D	102.001.068	Air flow transmitter, range 0...1000 Pa, automatic zeroing
 DPT-Flow-1000-D-40C	102.001.069	Air flow transmitter, range 0...1000 Pa, manual zeroing, extended ambient temperature range (-40...50 °C)
 DPT-Flow-2000-D	102.002.056	Air flow transmitter, range 0...2000 Pa, manual zeroing
 DPT-Flow-2000-AZ-D	102.002.057	Air flow transmitter, range 0...2000 Pa, automatic zeroing
 DPT-Flow-2000-D-40C	102.002.058	Air flow transmitter, range 0...2000 Pa, manual zeroing, extended ambient temperature range (-40...50 °C)
 DPT-Flow-5000-D	102.004.061	Air flow transmitter, range 0...5000 Pa, manual zeroing
 DPT-Flow-5000-AZ-D	102.004.062	Air flow transmitter, range 0...5000 Pa, automatic zeroing
 DPT-Flow-5000-D-40C	102.004.063	Air flow transmitter, range 0...5000 Pa, manual zeroing, extended ambient temperature range (-40...50 °C)
 DPT-Flow-7000-D	102.006.067	Air flow transmitter, range 0...7000 Pa, manual zeroing
 DPT-Flow-7000-AZ-D	102.006.068	Air flow transmitter, range 0...7000 Pa, automatic zeroing
 DPT-Flow-7000-D-40C	102.006.069	Air flow transmitter, range 0...7000 Pa, manual zeroing, extended ambient temperature range (-40...50 °C)

Dimensions

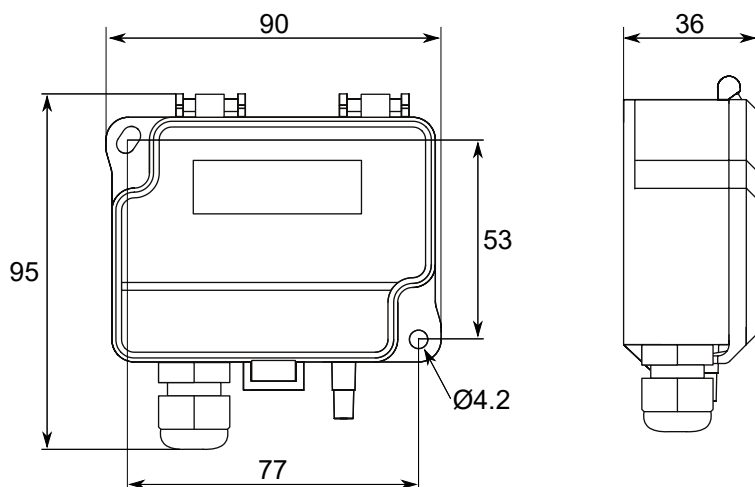

Supported standards and directives

Standard	Description
2014/30/EU	Electromagnetic Compatibility (EMC).
2011/65/EU	Restriction of Hazardous Substances (RoHS2) Directive.
(EU) 2015/863	Commission Delegated Directive, amending Annex II to Directive 2011/65/EU.
2012/19/EU	Waste electrical and electronic equipment (WEEE)
EN 61326-2-3:2021	Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 2-3: Particular requirements - Test configuration, operational conditions and performance criteria for transducers with integrated or remote signal conditioning
EN 61326-1:2021	Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 1: General requirements
EN 61000-6-3:2021	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments.
EN 61326-1:2013	Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 1: General requirements
EN 61000-4-2:2009	Electromagnetic compatibility (EMC). Testing and measuring techniques - Electrostatic discharge immunity test.
EN 61000-4-3:2006/ AMD2:2010	Electromagnetic compatibility (EMC). Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test.
EN 61000-4-4:2012	Electromagnetic compatibility (EMC). Testing and measurement techniques - Electrical fast transient/burst immunity test.
EN 61000-4-5:2012	Electromagnetic compatibility (EMC). Testing and measurement techniques - Surge immunity test.
EN 61000-4-6:2007/ IS1:2009	Electromagnetic compatibility (EMC). Testing and measurement techniques. Immunity to conducted disturbances, induced by radio-frequency fields.
EN 50581:2012	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances